



2000i (3 Phase Supply)

What to specify...

1. Model

2. Voltage

3. Volume or Vacuum

4. Pre-filter

5. Main filter

6. Connection Kit

7. Power Lead

8. Interfacing Kit


1	2	3	2000i	
Voltage	400V 3ph + N		220V 3ph	
Volume Control	0LX2010D		0LX2011D	
Vacuum Control	022120iD		022121iD	
Wattage	3.4 kW		3.4 kW	
Frequency	50Hz / 60 Hz		50Hz / 60 Hz	
Cabinet height (inc castors)	1400 mm		1400 mm	
Cabinet width (not inc hose)	725 mm		725 mm	
Cabinet depth (not inc hose)	726 mm		726 mm	
Cabinet weight	150 Kg		150 Kg	
Sound Rating (dBA)	59		59	
Airflow m³/hr	2200		2200	
Vacuum (kPa)	6.28		6.28	

4 **Labyrinth Pre-filter**




One supplied - See page 19-20

5 **Main Filter**



One supplied - See page 21-22 for your application

6 **Connection Hose Kit**




One supplied - See page 23-25 to suit your system

7 **Power Cable**


5M Fixed power cable, no plug fitted.

8 **Machine Interfacing (Optional)**



See page 27-29 to match your system

Allows the Purex system to interface with a piece of equipment connected to it.

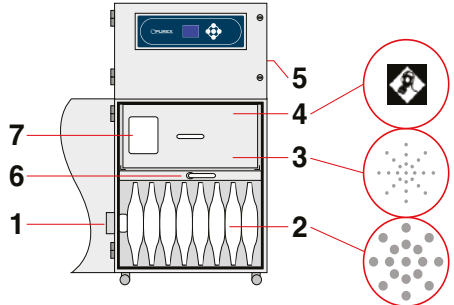Legend:

- 1) Air inlet - 150mm safe seal.
- 2) Pre-filter.
- 3) Main Filter (HEPA location). †
- 4) Main Filter (Carbon location). †
- 5) Clean air returned to workplace.
- 6) Filter locking handle.
- 7) Filter identification label.

All machines are mounted on four castors for increased mobility.

† Standard Filter Only

Digital Control System

A dedicated control, monitoring and display system unique to Purex fume extractors. All functions are fully automatic, all the user has to do is set the appropriate airflow on installation. The features of this system are designed to:

- Lower energy consumption by using variable speed motors and automatic flow control.
- Increase filter life by using the optimal extraction rate.
- Further protect people by constantly monitoring exhaust emissions.
- Interface with other equipment e.g. a laser.
- Maintain a constant extraction rate to prevent fume escape or damage to equipment.

System Features...

- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Adjustable airflow
- Clear and informative graphic display
- Gas and particle sensors on the exhaust
- Low capital and running costs
- Quick change patented Labyrinth pre-filters deliver longer filter life
- Submicronic (HEPA) filtration removes 99.997% of particles down to 0.3 microns
- Activated carbon filtration removes harmful gas
- Simple to install and quiet in operation
- Easy to relocate and precision made from stainless steel
- High performance brushless motors

Includes:

- 1 x Main filter
- 1 x Labyrinth pre-filter
- 1 x Power cable (no plug)

Accessories

Please see the accessories brochure.